

A19

ugolini®


Professional equipment for the refrigeration of natural beverages. Designed with specific technical features ensuring perfect product mixing.

Certifications



Available Voltages

230V 50Hz / 240V 50Hz / 115V 60Hz / 208-220V 60Hz / 100V 50-60Hz

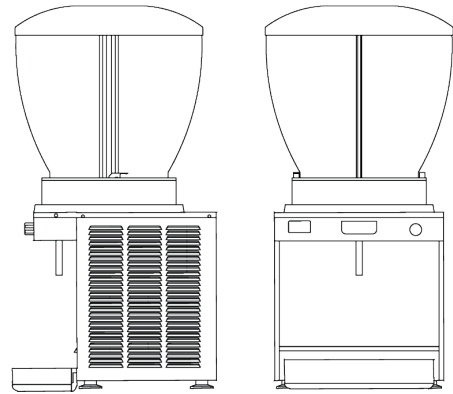

Technical Specifications	A 19
Container capacity (L)	19
Height (cm)	72
Width (cm)	32
Depth (cm)	40
Net weight, approx. (Kg)	20
Gross weight, approx. (Kg)	22
Power * (W)	300
Gas (230V 50Hz / 115V 60Hz)	R290
Gas (other voltages)	In compliance with current regulations, one of the following gases will be used: R1234ZE, R454C, R513a.

* Test conditions: 32°C - 230V 50Hz - 1st hour of operation

Additional Technical Features	Safety and control devices
Noise level below 70 dB	R290 gas models equipped with ATEX electrical components
Shatterproof PCTG container - BPA free	Hermetic compressor with protector
Stainless steel body	Mechanical product temperature control
Air-cooled condenser	
Rubberized tap	
Mechanical drive mixing	
Easy to disassemble and clean	

Optional Accessories

Electronic control and display of product temperature

MILANO DISPENSERS spa

Via Mario Ugolini, 3 - 27010 Torrevicchia Pia (PV) - Italia - +39 0382 1651 - www.milanodispensers.com - www.ugolinimilano.com

We reserve the right to make changes without prior notice.