

ARCTIC compact


Professional equipment for the refrigeration of beverages.
Available in versions with 1 to 3 tanks, with a capacity of 5 or 8 liters.

Certifications



Available Voltages

230V 50Hz / 240V 50Hz / 115V 60Hz / 208-220V 60Hz / 100V 50-60Hz

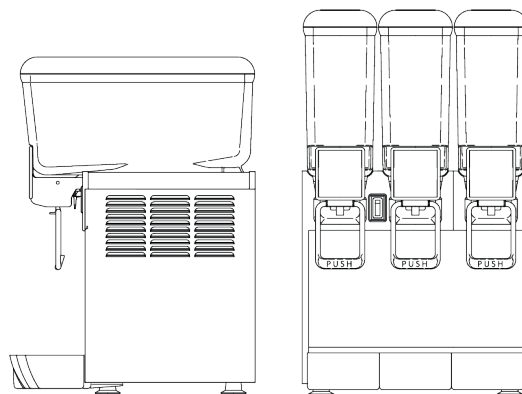

Technical Specifications	Compact 5/1	Compact 5/2	Compact 5/3	Compact 8/1	Compact 8/2	Compact 8/3
Container capacity (L)	5	10	15	8	16	24
Height (cm)	55	55	55	62	62	62
Width (cm)	18	25	37	18	25	37
Depth (cm)	39	39	39	41	41	41
Net weight, approx. (Kg)	13	17	22	14	17	22
Gross weight, approx. (Kg)	14	18	24	15	19	24
Power * (W)	250	350	550	250	350	550
Gas	R290	R290	R290	R290	R290	R290

* Test conditions: 32°C - 230V 50Hz - 1st hour of operation

Additional Technical Features	Safety and control devices
Noise level below 70 dB	ATEX electrical components
Shatterproof PCTG container - BPA free	Hermetic compressor with protector
Stainless steel body	Mechanical product temperature control
Air-cooled condenser	
Rubberized tap	
Magnetic drag mixing	
Easy to disassemble and clean	

Optional Accessories

Stainless steel gravity faucet

MILANO DISPENSERS spa

Via Mario Ugolini, 3 - 27010 Torrevecchia Pia (PV) - Italia - +39 0382 1651 - www.milanodispensers.com - www.ugolinimilano.com

We reserve the right to make changes without prior notice.