

NG 6 easy

ugolini®


Professional equipment for preparing cold creams, sorbets, and granitas. Also available in the ETC version (Electronic Temperature Control).

Certifications



Available Voltages

230V 50Hz / 240V 50Hz / 115V 60Hz / 208-220V 60Hz / 100V 50-60Hz

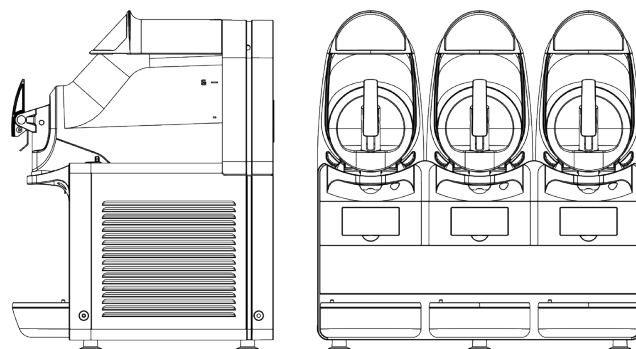

Technical Specifications	NG easy 6/1	NG easy 6/2	NG easy 6/3
Container capacity (L)	6	12	18
Height (cm)	62	62	62
Width (cm)	20	40	60
Depth (cm)	48	48	48
Net weight, approx. (Kg)	26	42 / 38 *	57
Gross weight, approx. (Kg)	28	45 / 41 *	61
Power ** (W)	460	640	950
Gas (115V 60Hz / 230V 50Hz)	R290	R290	R290
Gas (other voltages)	In compliance with current regulations, one of the following gases will be used: R1234ZE, R454C, R513a.		

* With Gas R290 ** Test conditions: 32°C - 230V 50Hz - 1st hour of operation

Additional Technical Features	Safety and control devices
Noise level below 70 dB	R290 gas models equipped with ATEX electrical components
Shatterproof PCTG container - BPA free	Hermetic compressor with protector
POM plastic container stirrer	Intuitive control panel (ETC)
Painted steel and ABS body	Display (ETC)
Air-cooled condenser	Electronic product density control
Accessible and cleanable condenser air filter	Electronic control and display of product temperature (ETC)
Fixed-speed gear reducer	Pre-equipped for tap lock
Tilted container for easy emptying	Day/night function (production/maintenance mode)
Patented magnetic transmission	
Easy to disassemble and clean	
Lid unlocking button	

Optional Accessories

Unlocking container / lid with key	Re-COVER: for energy savings and reduced condensation
LED WALL (illuminated front display)	Timer for day / night function
Water-cooled condenser system (ETC)	

MILANO DISPENSERS spa

Via Mario Ugolini, 3 - 27010 Torrevecchia Pia (PV) - Italia - +39 0382 1651 - www.milanodispensers.com - www.ugolinimilano.com

We reserve the right to make changes without prior notice.