

Quick-GEL


Professional equipment for gelato preparation. Equipped with a touch display and cup sensor.

Certifications



Available Voltages

230V 50Hz / 240V 50Hz / 115V 60Hz / 208-220V 60Hz / 100V 50-60Hz

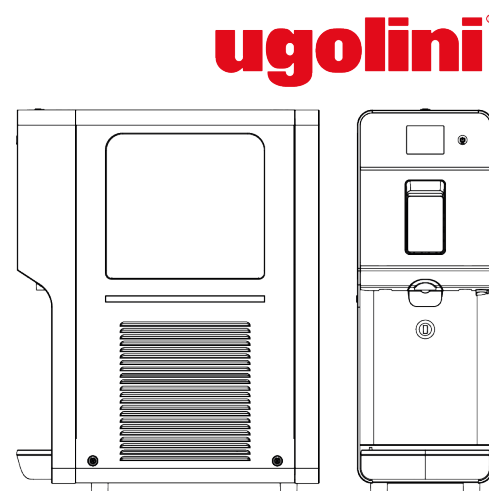

Technical Specifications

Quick-GEL

Container capacity (L)	4
Evaporator capacity (L)	2
Height (cm)	72
Width (cm)	26
Depth (cm)	57
Net weight, approx. (Kg)	50
Gross weight, approx. (Kg)	55
Power * (W)	500
Gas (115V 60Hz / 230V 50Hz)	R290
Gas (other voltages)	In compliance with current regulations, one of the following gases will be used: R1234ZE, R454C, R513a.

* Test conditions: 32°C - 230V 50Hz - 1st hour of operation

Additional Technical Features

Safety and control devices

Noise level below 70 dB	R290 gas models equipped with ATEX electrical components
Stainless steel container	Hermetic compressor with protector
POM plastic container stirrer	Touch display
POM plastic magnetic upper stirrer	Electronic product density control
Painted steel and ABS body	Electronic control and display of product temperature
Air-cooled condenser with variable-speed motor	Pre-equipped for tap lock
Variable-speed brushless motor	Product temperature alarm
Mechanical transmission	Day/night function (production/maintenance mode)
Cup presence sensor	
Easy to disassemble and clean	

Optional Accessories

Unlocking container/lid with key	Backlit graphics - LED technology
----------------------------------	-----------------------------------

MILANO DISPENSERS spa

Via Mario Ugolini, 3 - 27010 Torrevecchia Pia (PV) - Italia - +39 0382 1651 - www.milanodispensers.com - www.ugolinimilano.com

We reserve the right to make changes without prior notice.